WIREWOUND ELECTRONICS PVT.LTD.

Current Transformers For Quick Reference 5A TO 25 A

Low Cost 50/60Hz Current Transformers

Applications


Sensing Overload Current
Ground fault detection
Metering
Analog to Digital Circuits


Features

Excellent quality at extremely competitive price due to high volume production
Manufactured in an ISO 9001:2015 and IATF 16949:2016 certified facility
Fully RoHS & REACH Compliant
Electrical Specifications at 20°C
AC Series • Standard

Part No	Primary Current Amp	Turns Ratio	DCR [Ohms] Nominal	Net Weight [Grams]
W005	5	1000.1	33	13
W010	10	1000.1	33	14
W015	15	1000.1	33	14
W020	20	1000.1	33	14
W025	25	1000.1	33	14

Mechanical Drawing

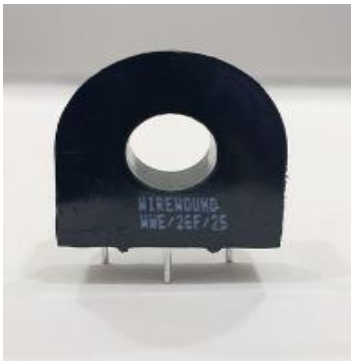

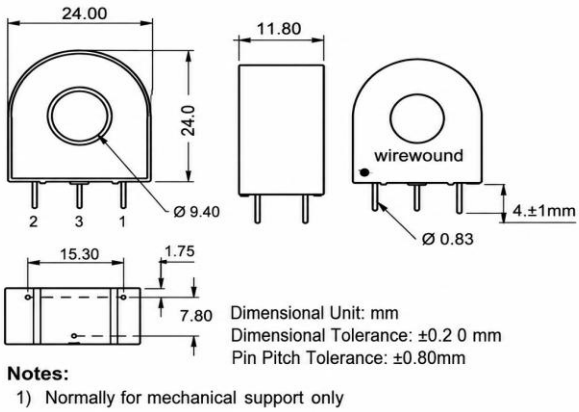

Notes:
1) Normally for mechanical support only

Schematic

