




WIREWOUND ELECTRONICS PVT.LTD.

(As an ISO 9001:2015 & IATF 16949:2016)

Drum Core Inductors (12X15) With Pin

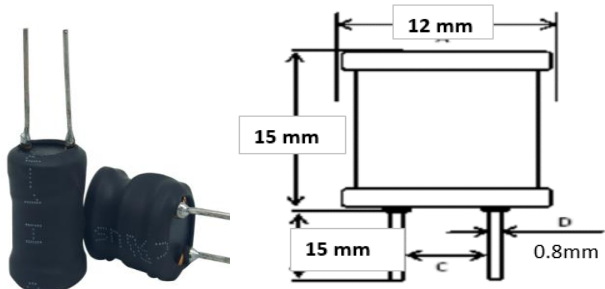

SPECIAL FEATURES :

Shrink tubing protected winding.

- Fixed lead spacing.
- Low cost.
- Wide range of inductance.
- Small mounting space required.
- The other types low DCR, large current.
- Best for power supply line.
- Vertical mount.

Sr No	SIZE	Part No	Inductance 1KHz @ 0.3V	Tolerance	Current Rating
1	12X15 WITH PIN	DI-1192	3.3uH	±10%	5A
2	12X15 WITH PIN	DI-1193	3.9uH	±10%	6A
3	12X15 WITH PIN	DI-1194	5uH	±10%	6A
4	12X15 WITH PIN	DI-1195	10uH	±10%	5A - 8A
5	12X15 WITH PIN	DI-1196	100uH	±10%	1.5A - 2A
6	12X15 WITH PIN	DI-1197	100uH	±10%	4A - 5.5A
7	12X15 WITH PIN	DI-1198	120uH	±10%	3 - 4A
8	12X15 WITH PIN	DI-1199	150uH	±10%	1.5A - 2A
9	12X15 WITH PIN	DI-1200	135uH	±10%	4A - 5.5A
10	12X15 WITH PIN	DI-1201	220uH	±10%	3 - 4A
11	12X15 WITH PIN	DI-1202	220uH	±10%	2A
12	12X15 WITH PIN	DI-1203	225uH	±10%	4 - 4A
13	12X15 WITH PIN	DI-1204	470uH	±10%	3 -3.5A
14	12X15 WITH PIN	DI-1205	680uH	±10%	1.5A - 2A
15	12X15 WITH PIN	DI-1206	3.3mH	±10%	200 - 350mA
16	12X15 WITH PIN	DI-1207	10mH	±10%	400mA
17	12X15 WITH PIN	DI-1208	10mH	±10%	800mA
18	12X15 WITH PIN	DI-1209	47mH	±10%	5A - 6A
19	12X15 WITH PIN	DI-1210	47mH	±10%	4A - 5.5A

TYPICAL APPLICATIONS

Power supplies.
DC-DC converters, TVS, LED drivers, computer,
Computer peripherals, home electric appliances.



