# WIREWOUND ELECTRONICS PVT.LTD.

## Current Transformers For Quick Reference 50A TO 70 A

Low Cost 50/60Hz Current Transformers


**Applications**

Sensing Overload Current
Ground fault detection
Metering
Analog to Digital Circuits


**Features**

Excellent quality at extremely competitive price due to high volume production
Manufactured in an ISO 9001:2015 and IATF 16949:2016 certified facility
Fully RoHS & REACH Compliant
Electrical Specifications at 20°C
AC Series • Standard

| Part No | Primary Current Amp | Turns Ratio | DCR [Ohms ] Nominal | Net Weight [Grams] |
|---|---|---|---|---|
| W050 | 50 | 1000.1 | 48Ω | 38 |
| W055 | 55 | 1000.1 | 42Ω | 38 |
| W060 | 60 | 1000.1 | 38Ω | 38 |
| W070 | 70 | 1000.1 | 28Ω | 38 |

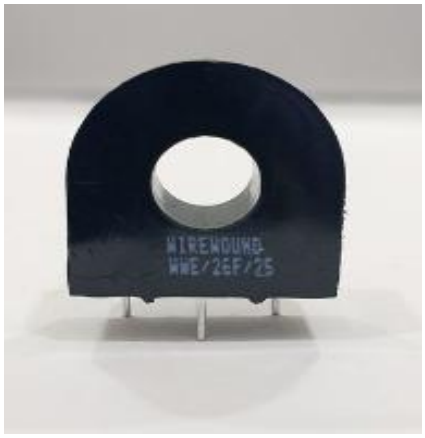


### Mechanical Drawing

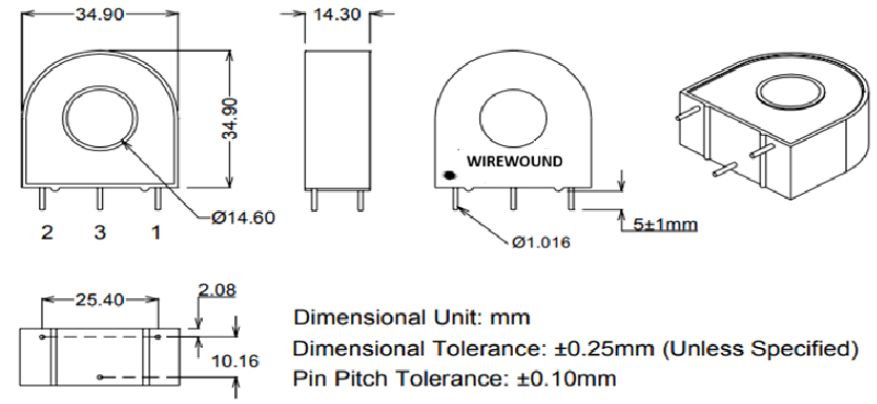


Dimensional Unit: mm
Dimensional Tolerance: ±0.25mm (Unless Specified)
Pin Pitch Tolerance: ±0.10mm



