



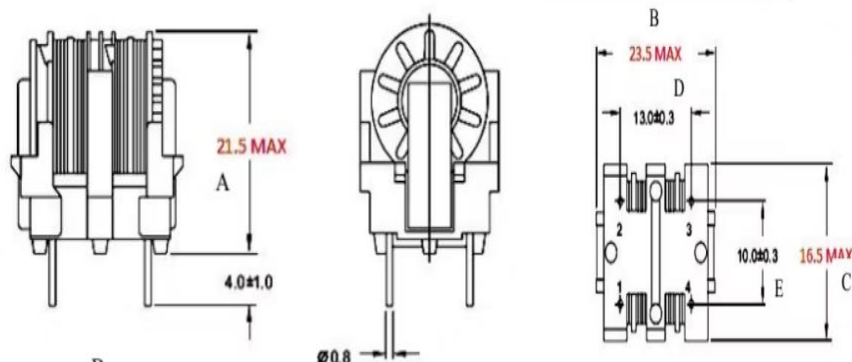

WIREWOUND ELECTRONICS PVT.LTD.

(As an ISO 9001:2015 & IATF 16949:2016)

Common Mode Choke -UT 20

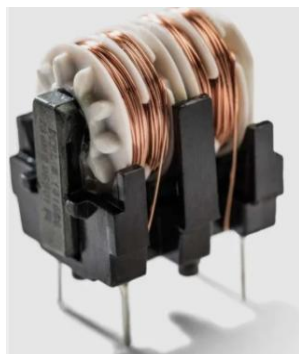

APPLICATIONS

- Off-line power supplies. Small Size Large Inductance
- Protects AC input from effects of switching regulators ..
- DC - DC Converters .
- Computer , TV , VCR , audio and office equipment

ELECTRICAL CHARACTERISTICS :

PART NO	INDUCTANCE (mH) (MIN)	CURRENT RATING (A)	DC RESISTANCE (Ω) (MAX)
CMC-4109	0.75	1.5	0.2
CMC-4110	1.2	1.25	0.2
CMC-4111	1.5	1	0.3
CMC-4112	1.8	1	0.4
CMC-4113	2.2	0.8	0.4
CMC-4114	3	0.8	0.4
CMC-4115	3.9	0.75	1
CMC-4116	4.2	0.60	1
CMC-4117	5.6	0.5	1
CMC-4118	6.4	0.5	1
CMC-4119	8	0.5	1
CMC-4120	10	0.5	1
CMC-4121	12	0.5	1
CMC-4122	14	0.4	1.5
CMC-4123	15	0.3	2
CMC-4124	22	0.25	2
CMC-4125	25	0.25	3
CMC-4126	33	0.25	4
CMC-4127	47	0.2	4

- 1) Test Frequency : 1KHZ / 1V
- 2) Operating Temperature Range : -40°C to + 125 °C range is application specific.
- 3) Winding Temperature Rise (at Rated Current) : 60K max.
- 4) Packaging : Supplied in bulk packaging.

