




WIREWOUND ELECTRONICS PVT.LTD.

(As an ISO 9001:2015 & IATF 16949:2016)

Common Mode Choke -ET 24

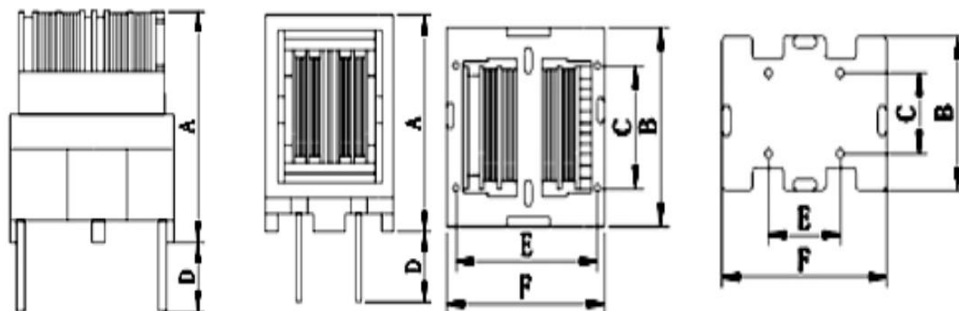

ET -24	Pin	Size(mm)					TYPE
		A	B	C±0.5	D±0.5	E±0.5	
	4	31	19	10	4	13	V

APPLICATIONS

- Off-line power supplies.
- Protects AC input from effects of switching regulators .
- DC - DC Converters .
- Computer , TV , VCR , audio and office equipment . .

ELECTRICAL CHARACTERISTICS :

PART NUMBER	Common Mode Inductance (mH) (1-2)(4-3)	DCR Ω	RATED current
CMC-4081	68	2.3	300mA
CMC-4082	48	2.0	400mA
CMC-4083	45	1.6	500mA
CMC-4084	40	2.0	800mA
CMC-4085	33	1.2	1A
CMC-4086	25	1	1.2A
CMC-4087	22	1	1.3
CMC-4088	20	1	1.5A
CMC-4089	15	1	1.5A
CMC-4090	12	1	1.5A
CMC-4091	8	1	2.5A
CMC-4092	10	0.5	2A
CMC-4093	4.5	0.5	3A
CMC-4094	3.9	0.5	3.5A
CMC-4095	3.3	0.5	4A
CMC-4096	2.4	0.5	5A

- 1) Test Frequency : 1KHZ / 1V
- 2) Operating Temperature Range : -40°C to + 125 °C range is application specific.
- 3) Winding Temperature Rise (at Rated Current) : 60K max.
- 4) Packaging : Supplied in bulk packaging.



Wirewound -Web- www.wirewound.in/Email Id:- wirewound@gmail.com/Mob-9822261409/7722077394