




WIREWOUND ELECTRONICS PVT.LTD.

(As an ISO 9001:2015 & IATF 16949:2016)

Common Mode Choke -ET 28

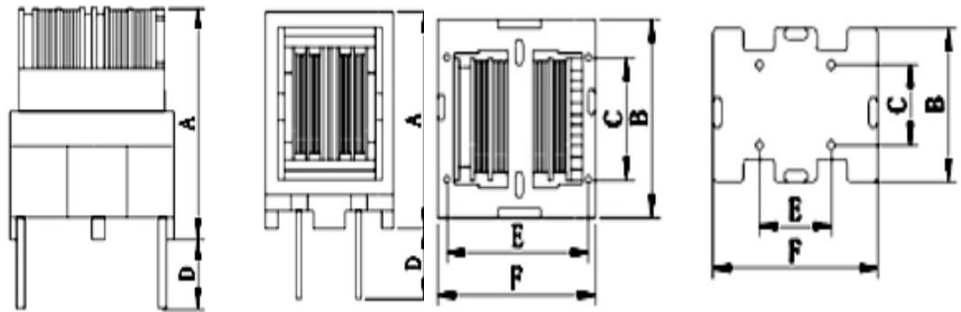

ET -28

PIN	SIZE						TYPE
	A	B	C $\pm$ 0.5	D $\pm$ 0.5	E $\pm$ 0.5	F	
4	36	22	10	4	13	30	V

APPLICATIONS

- Off-line power supplies. Small Size Large Inductance
- Protects AC input from effects of switching regulators ..
- DC - DC Converters .
- Computer , TV , VCR , audio and office equipment

ELECTRICAL CHARACTERISTICS :

PART NUMBER	Common Mode Inductance (mH) (1-2)(4-3)	DCR Ω	RATED CURRENT
CMC-4097	35	1.8	1A
CMC-4098	30	1.6	1.5A
CMC-4099	25	1.5	1.5A
CMC-4100	20	1.4	2A
CMC-4101	15	1.4	2A
CMC-4102	12	1.0	2.2A
CMC-4103	10	0.5	2.8A
CMC-4104	8	0.2	3A
CMC-4105	5.6	0.2	3.8A
CMC-4106	4.7	0.2	4A
CMC-4107	3.3	0.1	4A
CMC-4108	1.8	0.1	5A

- 1) Test Frequency : 1KHZ / 1V
- 2) Operating Temperature Range : -40°C to + 125 °C range is application specific.
- 3) Winding Temperature Rise (at Rated Current) : 60K max.
- 4) Packaging : Supplied in bulk packaging.

